

Life Cycle Performance of Various Energy Sources

B. SUNIL¹, DR. P. HEMA CHANDU²

¹ UG Student, Electrical & Electronics Engineering, Sasi Institute of Technology & Engineering, Tadepalligudem, Andhra Pradesh, India

² Professor, Electrical & Electronics Engineering, Sasi Institute of Technology & Engineering, Tadepalligudem, Andhra Pradesh, India

Abstract- As each the human populace and dwelling requirements grow, so does the global strength demand. However, the energy area is likewise one in every of the largest environmental polluters. Therefore, alternatives are presently being sought geared toward lowering environmental effects, one of the capability gears for which worries using lifestyles cycle assessment. This study, therefore, specializes in the maximum normally used non-renewable (black coal, lignite, herbal fuel line and nuclear) and renewable sources (wind, hydro and photovoltaic) withinside the Czech Republic in phrases in their construction, operation, and decommissioning periods. Environmental effects are assessed thru using decided on effect classes with the aid of using manner of product environmental footprint methodology. The outcomes spotlight the capability environmental effects related to strength technology for every of the number one power sources. Black coal and lignite energy plant life had been discovered to make contributions maximum to the worldwide warming, useful resource use, power providers and respiration inorganics classes. On the alternative hand, the effect on water depletion and useful resource use, mineral and metals classes had been discovered to be most importantly stricken by the manufacturing of strength from photovoltaic energy plant life. Finally, it's far proposed that the outcomes be hired to layout eventualities for the destiny power mix.

Indexed Terms- life cycle assessment; electricity generation; environmental performance; environmental impacts

I. INTRODUCTION

Electricity intake is growing sharply in parallel with the growing fashionable of residing of the

international's population. Electricity intake has elevated via way of means of nearly 1/2 of over the past 20 years. According to information from the International Energy Agency, a median of 3.2 MWh consistent with capita have been ate up in 2017 [1]. At the equal time, the electricity quarter is one of the international's biggest polluters and is liable for the manufacturing of round 33 Gt of CO₂ emissions consistent with year. Furthermore, the power

combinations of maximum nations withinside the international are primarily based totally at the usage of fossil fuel, immediately coal [2], a shape of manufacturing that exerts huge environmental effects thru the manufacturing of as much as 30% of all international CO₂ emissions [1]. Indeed, it's far CO₂ emissions, and different vast environmental effects along with water intake, which have brought about efforts to decentralize the manufacturing of power and to decorate environmental security [3]. At the equal time, the extent of hobby withinside the use of renewable strength reasserts (RES) has elevated substantially. The benefits of RES consist of their low-emission operation and the diversification and decentralization of strength deliver [4]. However, it's far faulty to don't forget renewables as being absolutely emission-free. In the ultimate decades, huge development became carried out withinside the area of manufacturing RES technology, decreasing the funding rate and fabric reasserts and growing operational efficiencies. A top instance is the sun enterprise wherein era development enabled the manufacturing of thinner sun mobiliary wafers with much less waste. Diamond cord sawing is a brand-new era to reduce the sun wafers wherein the abrasive is constant to the wires. This era yields decreased kerf loss, consequently saving fabric and retaining assets for the destiny, reduces dangerous waste and calls for fewer assets for postprocessing on the equal time [5]. A exact have a look at approximately LCA of

numerous renewable reasserts may be discovered in [6]. Sherwani et al. [7] posted an LCA have a look at evaluating numerous varieties of photovoltaic (PV) modules and structures primarily based totally on amorphous, mono-crystalline, poly-crystalline and different technology.

Life cycle evaluation (LCA) gives a great analytical device for the evaluation of the environmental effects related to the entire of the electricity plant life' lifestyles cycles. The fundamental gain of the evaluation is that it serves to assess all of the fabric and power flows that input and go out the assessed system, along with the waste produced and emissions. This complete evaluation prevents the moving of troubles from one section of the lifestyles cycle to some other or from one environmental hassle to some other [11]. Many research has already addressed the evaluation of the environmental effects of power reasserts [7,8,12–17]. In the European context, the environmental effects related RES and NRES had been assessed, for instance, in Greece [4]. The evaluation became centred especially on effects related to atmospheric emissions (CO₂, CH₄, NO_x, SO₂, particulate matter-PM₁₀, CO, HCl) and different waste this is produced throughout the electricity deliver lifestyles cycle.

A similarly have a look at from Greece offered each the environmental effects of contemporary strength technology and people related to destiny ability power combinations for 2020 and 2030 [13]. Moreover, the document became performed at the evaluation of the environmental effects of the Polish power blend. It corresponds with the Czech Republic, wherein the electricity quarter is particularly constructed on fossil fuels [18].

A similarly LCA have a look at addressed situations regarding the destiny improvement of the power blend

in Spain [19] and transmission and distribution structures, and the ensuing power losses have been mentioned in some of different research [12,13,20]. In addition, out of doors Europe, research had been performed in, for instance, Mexico [15], Canada [16] and China [21].

II. OVERVIEW OF CZECH ELECTRICITY PRODUCTION AND CONSUMPTION

Electricity intake withinside the Czech Republic is continuously growing and, in 2018, it reached a price of 73.9 TWh, 47% of which changed into generated via way of means of coal-fired strength flora, which can be considerable reasserts of pollutant emissions, e.g., the greenhouse gases SO₂, NO_x and particulate matter (PM₁₀). While greenhouse fuel line emissions withinside the Czech Republic reduced via way of means of multiple 0.33 withinside the duration 1990 to 2016 in contrast with the European Union average, emissions withinside the Czech Republic continue to be high, i.e., 12.4 t CO₂ eq. withinside the Czech Republic in comparison to 8.7 t CO₂ eq. withinside the EU [22]. The growing intake of energy has been followed via way of means of a corresponding boom withinside the ability environmental impacts [23]. After coal-fired strength flora, the second one energy manufacturers are nuclear strength flora which produced 34% of all energy in 2018 [24]. RES contributed 11% to the whole produced energy. The percentage of the numerous reasserts withinside the power blend of the Czech Republic is always converting and evolving (see Table

1) In 2009, the proportion of gross energy

Table-I

	2015	2016	2017	2018	The average share of Total	Number of Case studies
Energy Source	GWh	GWh	GWh	GWh		
Black coal	51,656	5720	4453	3455	5%	1
Lignite	35,945	3228	36,978	37,734	43%	2
Natural gas	1978	3422	3388	3488	4%	1
Nuclear power	26,841	24,104	28,340	29,921	32%	2
Hydro power	3071	3202	3040	2679	4%	8
Solar energy	2264	2132	2193	2340	3%	6
Wind Energy	573	497	591	609	1%	2
Other	8052	7997	8054	7776	9%	0
Total	83,888	83,302	87,038	88,002	10%	2
	1-10 MWe	1				

Table I. Overview of electricity production in the Czech Republic in the period 2015–2018 based on the energy sources and technologies considered in the presented study.

A closer consideration of the various types of revealed the following year-on-year development. Due to excessive feed-in price lists there was an excessive growth of PV established electricity in 2010 (from 465 MWp to 1959 MWp). In the subsequent years the feed-in tariff changed into reduced and new regulations on connecting PV structures had been introduced. Concerning wind electricity flora, the established ability has improved yr-on-yr collectively with the quantity of strength produced. In 2009, the established ability changed into 193 MWe, attaining 316 MWe in 2018. The gross quantity of strength constituted of this supply extra than doubled in 2018 to 609 MWh. The established ability of hydroelectric electricity flora improved barely yr-on-yr from 2.2 MWe in 2009 to 2.3 MWe in 2018. However, because of dry intervals and decreased river flows, the strength produced reduced through 33% within the monitored length to 1,628,830 MWh [24]. The debate at the destiny composition of the power mix, and the ideal proportion of diverse styles of power reasserts, has been underway within the Czech Republic for lots of years. Furthermore, numerous legislative measures and plans had been introduced, aimed toward growing the proportion of RES within the Czech power mix. The subject matter is likewise connected to the Energy and Climate Plan of the Czech Republic,

which envisages an growth in the proportion of renewable reasserts as much as 22% of general power intake through 2030 [25]. Hence, this study focused on the assessment of the environmental impacts of electricity generation sources. The study assessed a total of 22 power plants, i.e., six NRES and 16 RES. Table 2 presents evaluated energy sources in the study and its installed capacities.

III. MATERIALS AND METHODS

This takes a look at aimed to rent the LCA technique to assess the capacity environmental effects of strength reasserts within the Czech Republic the use of the PEF 2. zero methodology. The take a look at assessed the construction, operation, protection and decommissioning of diverse reasserts. The purposeful unit changed into described because the manufacturing of one kWh of strength furnished to the grid after deducting the intake issue as a result of the manufacturing of the respective source. The goal changed into to consist of representatives of all classes of strength reasserts, i.e., non-renewable and renewable, each centralized and decentralized. In the analysis, it included 91% of strength manufacturing classes (see Table 1). Only reasserts placed within the Czech Republic which have licenses to deliver strength had been taken into account. Table 1 gives the

quantities of strength produced through the diverse reasserts and the wide variety of technology assessed on this take a look at study.

IV. SYSTEM BOUNDARY DEFINITION

Each product gadget includes a distinctive quantity of tactics and flows. While different tactics can be associated with the existence cycle of the assessed product, they're now no longer taken into consideration applicable for the evaluation. So-referred to as gadget limitations serve to differentiate among vital and nonessential tactics. The suitable choice of the gadget limitations is considerable when you consider that they have an effect on the effects of the study [11]. The existence cycles of the taken into consideration strength reasserts had been divided into 3 phases, i.e., production and existence-time restore and protection centers period (marked C), operation (marked O) and the decommissioning period (marked D) (Figure 1). Energy and fabric flows input and go out every of the person phases. The enter can also additionally include both substances or the desired electric or thermal strength. At the identical time, the output is most usually emissions to environmental components, the waste produced or secondary uncooked substances.

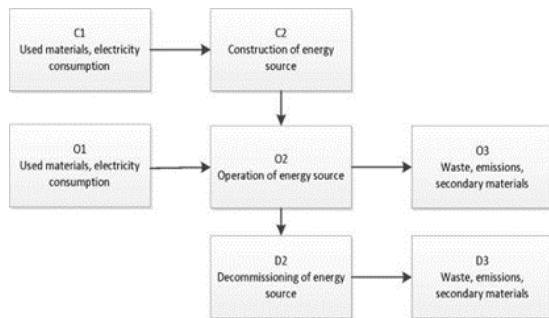


Fig 1 The system boundaries applied in the study.

The limitations of the gadget with appreciate to the electricity reasserts have been shortened the use of module C3, i.e., via way of means of the waste generated and secondary uncooked substances at some stage in the development phase, and through module D1, cloth and electricity flows required at some stage in decommissioning, i.e., gasoline and electricity. The limitations of the gadget have been adjusted in each instance for 2 motives. The facts for module C3 became acquired handiest for hydropower plants.

Following the calculation in their environmental effects, it became determined that their contribution inside the complete of the assessed gadget became negligible, i.e., in absolute values, it became same to 0%. In the case of module D1, facts have been acquired handiest for coal/lignite and nuclear strength plants. The effects of the contribution of this module to the general effects indicated that this module additionally exerted insignificant environmental consequences on the chosen effect categories. Since the discovered environmental effects of modules C3 and D1 seemed to be marginal, they have been removed from the gadget limitations for the motives stated above, i.e., to keep consistency in phrases of the evaluation of all of the electricity reasserts.

The expected service life differed for each type of source. The various life-times applied in the study are presented in Table 2

TABLE 2

Energy Source	Power Plant	Life-Time (Years)
Lignite/Black Coal/Natural gas	Subcritical steam power plants, Natural gas combined cycle (NGCC)	40
Nuclear	Nuclear power plant with a pressurized water reactor (PWR)	60
Water	Hydroelectric power plants	60
Wind	Wind turbines	20
Solar	PV Panels	30

Table 2 The considered life-times of electricity sources according to the Product Category Rules Methodology.

V. LIFE-CYCLE INVENTORY

The 2nd section of the lifestyles cycle inventory (LCI) includes the gathering of records on all of the big enter fabric and power flows and the emissions to all

additives of the surroundings or different waste streams related to the energy era lifestyles cycle. Data series accommodates a key level within the LCA look at because the scope and element of the enter records can also additionally drastically have an effect on the consequences of the look at. Primary (foreground) records have been acquired for the length 2015–2018 on the bulk of the strength plant operators for the functions of this look at. In instances wherein no enter records have been available, secondary records from the Sphera database or coinvent have been employed, or the records have been calculated primarily based totally on professional estimates or literature sources.

5.1 CONSTRUCTION

Data regarding the development of electricity vegetation and principal technological additives are tough to obtain; indeed, those facts are typically now no longer to be had at all. In this study, number one facts have been received handiest for the water supply electricity plant. In all of the different cases, professional estimates have been made on the premise of preceding projects, literary and statistics supplied with the aid of using producers and suppliers.

5.2 OPERATION

The operational information acquired had been used to evaluate the technological and different tactics surrounding this duration. To gain constant results, all of the mass and strength flows had been protected for a minimal duration of 1 year. The common fee for the duration 2015–2018 become then used to limit the effect of great events

5.3 DECOMMISSIONING

Since the observe served for the evaluation of simplest operational reasserts within the Czech Republic, no number one fact at the decommissioning and elimination of strength reasserts had been obtained. Hence, literary references and professional estimates had been used within the observe regarding this thing of the lifestyles cycle from preceding checks and studies. alloy steels, and its manufacturing results in greater good sized environmental impacts.

VI. LIFE CYCLE IMPACT ASSESSMENT

The product environmental footprint (PEF or EF) method advanced on the Joint Research Centre of the European Commission became selected to decide the environmental influences of strength production. This method is carried out to assessing environmental influences throughout diverse effect classes. Environmental effect evaluation using the EF 2. zero approach is suggested with the aid of using the European Commission for the evaluation of the environmental footprint of products. Since strength technology is a carrier that offers a selected product, the EF method is taken into consideration appropriate for the environmental evaluation thereof. The following effect classes had been decided on for the environmental effect evaluation because of their significance for the area of the European Union, as indicated with the aid of using the weighting elements of the EF 2. zero method. Selected effect classes:

- Climate change (kg (CO₂ eq.))
- Resource use, fossils MJ
- Resource use, minerals and metals (kg Sb eq.)
- Water scarcity (m³ world eq.)
- Particulate matter (disease incidents)

VII. LIFE CYCLE IMPACT ASSESSMENT OF THE ENERGY SOURCES USED IN THE CZECH REPUBLIC

The following segment gives the environmental influences related to the existence cycles of person electricity reasserts and the manufacturing of one kWh. Following figures gift the effects from the characterization section for person effect categories. The effects quantify the sum of the environmental influences related to the complete existence cycle of every source, particularly the construction, renovation, operation and decommissioning phases. The effects for person forms of energy vegetation are aggregated.

VIII. CLIMATE CHANGE

Figure 2 affords comparisons of strength reasserts in phrases in their environmental influences at the weather extrude class, expressed in phrases of kg CO₂ equivalent. The maximum influences are related to the existence cycle of coal-fired energy plant life, on common 953 g CO₂/kWh. The effects correspond to

different research, in keeping with which worldwide warming potentation (GWP) values variety among 750 g and 1372 g CO₂/kWh [10,12,14]. The effects accordingly suggest that coal reasserts exert about double the effect of herbal fuel line reasserts. Renewable reasserts (photovoltaic, wind, hydro) and nuclear reasserts exert notably decrease influences at the weather extrude class. The influences of nuclear sources are the bottom of all reasserts with recognize to this class, at 1. forty-five g CO₂/kWh. Other research has mentioned GWP values related to the existence cycle of nuclear energy plant life with very excessive dispersion, i.e., 2 g to a hundred thirty g CO₂/kWh [10,]. The variability of the effects is due especially to the attention of various gasoline enrichment technology and methodological approaches [10]. The influences of renewable strength reassert with challenge to this class are in many instances decrease than the ones of non-renewable reasserts, i.e., the existence cycle of hydropower plant life is 22 g CO₂/kWh, wind energy plant life 19 g CO₂/kWh and photovoltaic energy plant life eleven g CO₂/kWh.

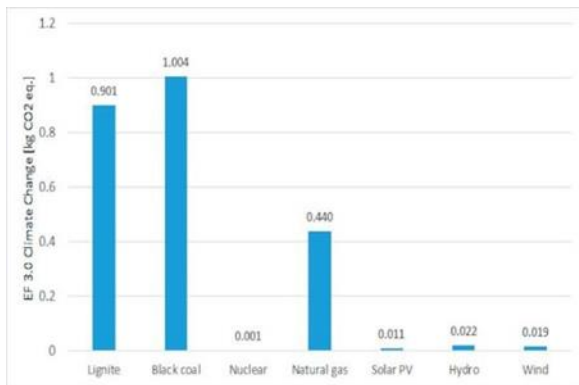


Figure 2. Environmental impacts of selected types of energy sources on the climate change category. The results are related to 1 kWh of electricity supplied to the grid. The results are expressed in kg CO₂ equivalent.

Most of the influences of fossil fuels (black coal, lignite and herbal gas) are associated with the operational segment, especially gasoline combustion (Figure 3). In the case of hydropower, the development segment of the energy plant and, subsequently, the intake of strength from the grid for its personal operation functions for the duration of the operational length make a contribution maximum to

the weather extrude class. Concerning small hydropower flora, the effect of the manufacturing of waste for the duration of the operation of the energy plant is likewise fairly tremendous. The fairly great variance withinside the environmental influences of hydropower flora indicated with the aid of using preceding case research become because of the differing situations of person centres in phrases of the slope and go with the drift of the river.

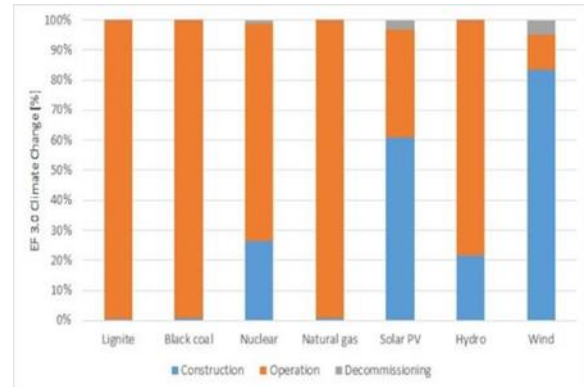


Figure 3. Contributions of the various life cycle phases (construction, operation and decommissioning) of energy sources to the climate change category. Environmental benefits excluded.

IX. RESOURCE USE, ENERGY CARRIERS

A contrast of power reasserts withinside the aid use, power companies effect class, expressed in phrases of MJ of number one power, is supplied in Figure 4. The maximum vast effects related to this class relate to fossil gasoline reasserts, i.e., 8. nine MJ/kWh for lignite energy flowers and 11.6 MJ/kWh for black coal energy flowers. Lignite reasserts exert an about 16% better effect than do herbal fuel line reasserts, whilst coal reasserts exert a 19% better effect because of the better performance of fuel line reasserts. Other reasserts exert very-low effects in comparison to the ones of fossil fuels; the effect of nuclear energy flowers in this class quantities to 0.6 MJ/kWh and, withinside the case of renewable reasserts, the maximum vast effect pertains to hydropower flowers at 0. three MJ/kWh.

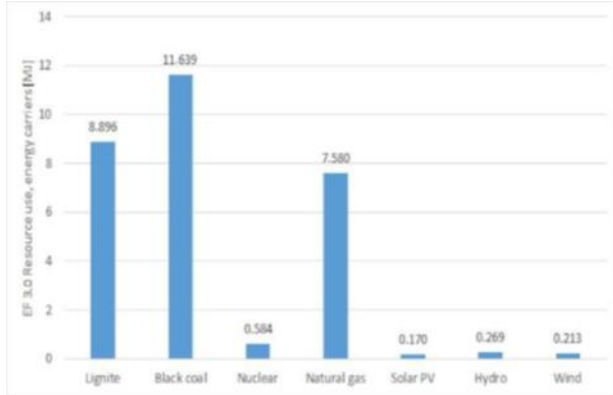


Figure 4. Environmental impacts of selected energy sources on the resource use, energy carrier's category. The results related to 1 kWh of electricity supplied to the grid. The results are expressed in MJ of primary energy.

Concerning fossil gasoline reasserts, all effects in phrases of the useful resource use, power companies class relate to the operational segment, i.e., the gasoline extraction and practise processes (Figure 5). Concerning coal reasserts, enormously excessive dispersion of effects is obvious because of the differing efficiencies of the assessed energy plants (the choice blanketed an older energy plant with below-common efficiency, and a brand-new energy plant with a excessive degree of strength era efficiency). The effects of nuclear reasserts in this class relate specially to the operational segment and situation basically the practise, extraction and enrichment of nuclear gasoline. In the case of renewable reasserts, the effects in phrases of the useful resource use, power companies class relate typically to the manufacturing of the substances used withinside the production of those energy units. As regards the operational segment, the effects in this class relate to the strength consumed, that is furnished from the Czech power mix. The maximum ability for environmental blessings pertains to renewable reasserts, due to the fact that a enormous quantity of the powering depth uncooked substances used of their production may be reused following decommissioning.

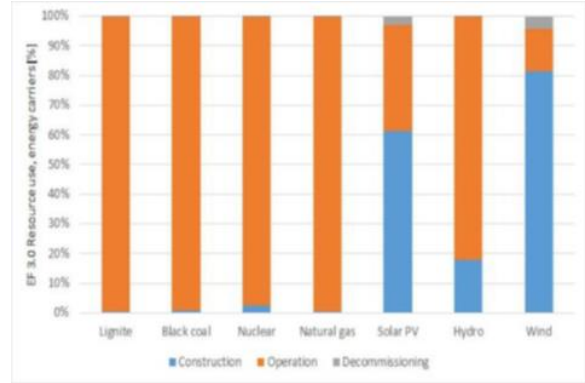


Figure 5. Contributions of the various life cycle phases (construction, operation and decommissioning) of electricity sources to the resource use, energy carrier's category. Environmental benefits excluded.

X. RESOURCE USE, MINERALS AND METALS

An evaluation of power reasserts and their influences at the useful resource use, minerals and metals class, expressed in phrases of kg Sb equivalent, is furnished in Figure 6. The environmental footprint method employs the CML approach to assess the intake of mineral uncooked substances and metals. Although no consensus has but been reached in phrases of the advice of the usage of a selected method for the assessment of this effect class, a examine [9] that assesses the outputs of this class the usage of distinct assessment techniques encouraged the CML approach. The effects advise that the maximum vast effect in this class pertains to the existence cycle of photovoltaic reasserts, i.e., 0.01 g Sb eq./kWh. The vast variance this glaring withinside the effects regarding photovoltaic electricity plant life is because of the attention of various panel technologies (monocrystalline, polycrystalline silicon and Cd-Te), variations withinside the placement of the panels (at the roofs or partitions of buildings, in fields) and differing inclination.

According to this and different studies, the effectiveness of PV panels is encouraged mainly through the era used, the suitability of the web page and the vicinity of the panels. The significance of the slope of the panel is likewise evidenced through the effects of this examine, from which it may be concluded that panels positioned on partitions, i.e., in

a vertical position, are appreciably much less powerful than horizontally-placed panels (on roofs or in fields). A in addition examine that addressed the environmental influences of the existence cycle of polycrystalline panels established withinside the United Kingdom and Spain offered exams for the abiotic depletion detail effect class. The ensuing values ranged among 0.0027 g and 0.0105 g Sb eq./kWh and therefore corresponded to the effects of this examine. However, the above referred to examine did now no longer examine the quilt of the existence cycle of photovoltaic panels. Approximately 15-instances decrease values are related to wind reasserts, i.e., 0.0007 g Sb eq./kWh. All the opposite varieties of reasserts had been located to have negligible effect values in phrases of this class. The lowest influences are associated with the existence cycle of the lignite electricity plant, i.e., 9.84×10^{-5} g Sb eq./kWh.

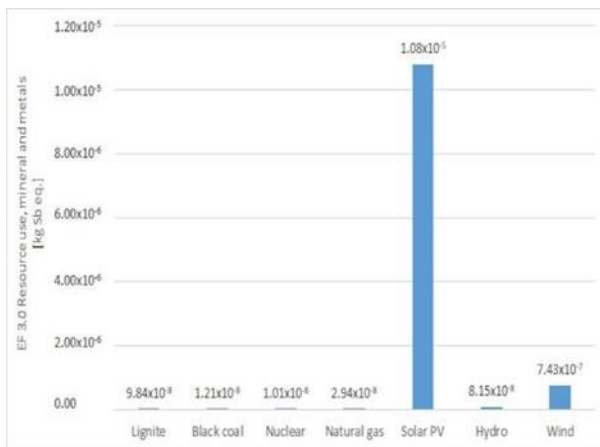


Figure 6. Environmental impacts of selected energy sources on the resource use, mineral and metals category. The results relate to 1 kWh of electricity supplied to the grid. The results are expressed in kg of antimony equivalent.

It is apparent from Figure 7 that photovoltaic reasserts exert effects at the aid use, mineral and metals class, particularly with problem to the development phase, i.e., the manufacturing of creation materials (especially mining and the processing of numerous metals). With appreciate to the manufacture of monocrystalline and polycrystalline panels, the best effect issues the manufacturing of silver and, withinside the case of cadmium-tellurium panels, the manufacturing of cadmium. The have an effect on of the composition of the PV panel is likewise highly

extensive in phrases of this class, i.e., panels primarily based totally on Cd-Te exert a kind of 5 instances decrease effect at the aid use, mineral and metals class. The values for polycrystalline and monocrystalline panels are comparable. In the case of wind reasserts, effects regarding the aid use, mineral and metals class relate specially to the manufacturing of creation materials (creation phase), the primary contributing elements being the mining and manufacturing of copper. To coalfired energy plants, the effect in this class pertains to the operational phase, especially the mining and training of the fuel.

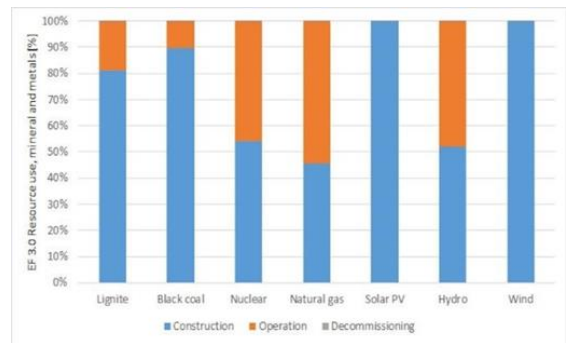


Figure 7. Contributions of the various life cycle phases (construction, operation and decommissioning) of electricity sources to the resource use, minerals and metals category. Environmental benefits excluded.

XI. WATER SCARCITY

A assessment of the numerous strengths reasserts and their influences at the water intake effect class, expressed in m³, is furnished in Figure 8. The outcomes illustrate that the maximum huge influences situation the existence cycle of photovoltaic reasserts, i.e., 1. sixty-nine m³/kWh. The influences in this class relate to the development section and the mining and manufacturing in their structural elements, specifically steel components (silicon, Cd-Te and the metals for the manufacturing of digital parts). The huge variations in phrases of the usage of the hooked-up ability and strength produced and, thus, the outcomes of the case research are because of the identical elements as noted withinside the preceding chapter, i.e., the general suitability of the place and the slope and positioning of the panel and the technology. According to the outcomes of research that assessed the water footprint of strength reasserts, common

worldwide values for water intake in line with kWh produced through photovoltaic panels ranged from 0.00002 to 0.00109 m³/kWh. One look at provided water intake values of as excessive as 0.0003 m³/kWh. The outcomes of preceding research differed specially because of the use of various assessment methodologies. The EF technique assessment technique employs the Water Scarcity Index of Available Water Remaining (AWARE) technique with the consumer deprivation ability indicator (deprivation-weighted water intake), while that research hired the Water Footprint technique to assess the quantity of water fed on and polluted all through strength generation.

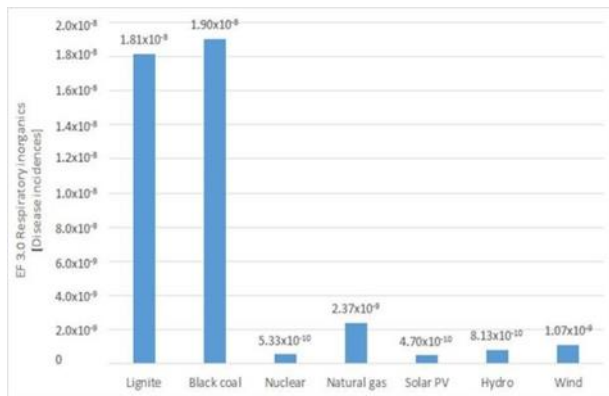


Figure 8. Environmental impacts of selected energy sources on the water scarcity category. The results relate to 1 kWh of electricity supplied to the grid. The results are expressed in m³ world equivalent.

The lifestyles cycle of nuclear reasserts exerts an about 5 instances decrease impact, and the effects of this observe imply that different forms of strength reassert exert decrease influences of as much as numerous orders of magnitude.

Figure 9 suggests the ratio of character strength supply lifestyles cycles withinside the water shortage category. In the case of photovoltaic and wind reasserts, maximum of the influences relates to the manufacturing of structural elements, especially the manufacturing and extraction of metals and electric components. Both forms of renewables additionally have tremendous capability in phrases of environmental advantages on the stop of the supply lifestyles cycle. In the case of nuclear reasserts, maximum of the environmental influences relates to

the operation of energy flowers and, in particular, 3 precise processes, i.e., the extraction and guidance of nuclear fuel, the manufacturing of boric acid and the evaporation of water from cooling towers. With admire to non-renewable reasserts, maximum of the influences relate to the operation of energy flowers, specially the extraction and guidance of fuel.

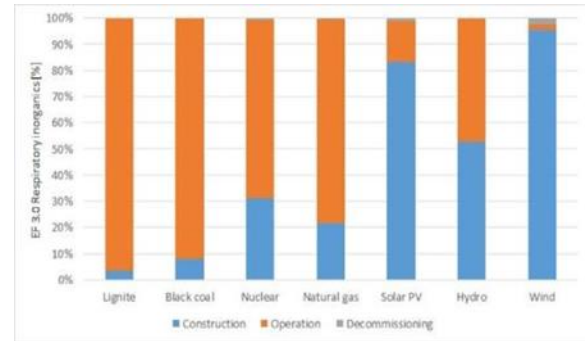


Figure 9. Contributions of the various life cycle phases (construction, operation and decommissioning) of electricity sources to the water scarcity category. Environmental benefits excluded.

XII. PARTICULATE MATTER

A contrast of the influences of person strength reasserts at the precise depend class expressed because the variety of disorder incidents is provided in Figure 10. The maximum vast influences relate to the lifestyles cycle of coal-fired electricity vegetation, i.e., 1.9x10⁻⁸ for black coal-fired electricity vegetation and 1. eightx10⁻⁸ for lignite-fired electricity vegetation. The manufacturing of strength with the aid of using herbal fuel line electricity vegetation exerts an about 8 instances decrease effect. The lowest influences of all of the assessed reasserts relate to the manufacturing of strength from photovoltaic and nuclear electricity vegetation. With appreciate to hydro reasserts, again, it's far viable to examine a vast variance withinside the values among the case research relying at the houses of the site. A have a look at [2] that addressed the effect of strength at the surroundings pronounced that the common international citizen produced 2. fifty-five kg PM_{2.5} eq. in 2011 because of strength consumption. According to the have a look at, greater than 94% of this effect associated with the operation of coal-fired electricity vegetation, whilst different reasserts contributed simplest marginally to this effect

class. A have a look at that targeted at the environmental influences of the Greek strength blend pronounced the manufacturing of 1.484 kg PM10 in keeping with 1 MWh of strength produced with the aid of using coal-fired electricity vegetation; moreover, the combustion of coal reasserts exerted the maximum vast impact in this effect class [4]. While it isn't always viable to evaluate the outcomes of those research because of their using special assessment methodologies, the equal fashion turned into decided withinside the values of the assessed strength reassert on this have a look at and the research mentioned above.

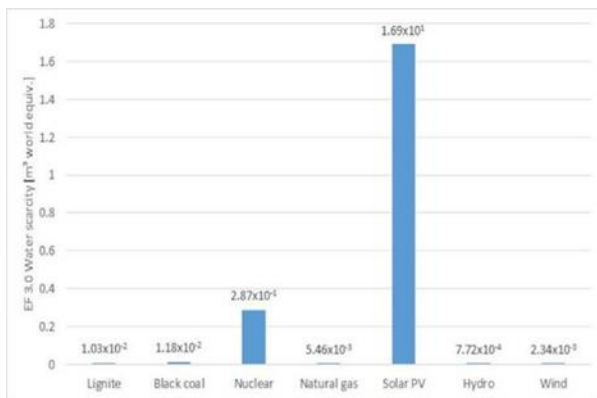


Figure 10. Environmental impacts of selected energy sources on the particulate matter category. The results relate to 1 kWh of electricity supplied to the grid. The results are expressed in the number of disease incidents.

As some distance because the lifestyles cycle of coal-fired electricity vegetation is concerned, effects on this class relate in particular to the operational segment, i.e., the combustion of coal (Figure 11). The 2nd maximum full-size effect on this class refers back to the operational segment of herbal fuel line sources, specifically the extraction and processing of herbal fuel line. With admire to RES, the effects relate in particular to strength intake withinside the creation segment, specifically the manufacturing of structural elements. In the case of nuclear sources, the effects on this class basically difficulty the operation of the source, specifically the manufacturing of boric acid and the extraction and processing of nuclear fuel.

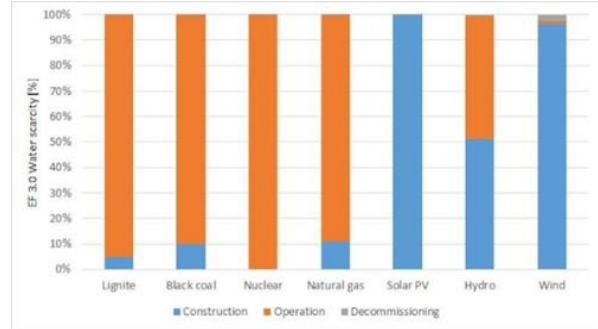


Figure 11. Contributions of the various life cycle phases (construction, operation and decommissioning) of electricity sources to respiratory inorganics. Environmental benefits excluded.

CONCLUSION

This has a look at assesses the influences of the existence cycles of numerous electricity reasserts operated withinside the Czech Republic on decided on effect classes. Based at the outcomes of the widespread LCA have a look at, it may be said that whilst NRES exert environmental influences, specifically withinside the operational section, the influences of RES relate often to their construction. The decommissioning section exerts marginal environmental influences as compared to the alternative phases.

The outcomes of the have a look at may be used at numerous levels. Since the useful unit and the machine limitations are maintained for all of the reasserts considered, the outcomes may be used for the contrast of or greater electricity reasserts. The outcomes additionally genuinely pick out the section or character techniques wherein optimization or development is suitable from the LCA factor of view. NRES, particularly black-coal and lignite energy plant life, contain the maximum substantial participants to the worldwide warming, aid use, electricity service and particulate count number classes. Since those reasserts account for about 47% of the Czech electricity blend, it may be said that those 4 classes are maximum suffering from energy technology withinside the Czech Republic. The manufacturing of energy from photovoltaic energy plant life contributes maximum to the water shortage and aid use, minerals and metals classes. Nuclear, hydro and wind energy plant life make a contribution to the above-referred to effect

classes to a lesser extent. However, it isn't viable to unambiguously suggest those 3 sorts of energy gadgets as maximum appropriate for the destiny Czech electricity blend from the factor of view of environmental influences and electricity protection because they have a look at does now no longer consider, for example, the destiny control of spent nuclear gas and the development and operation of a deep nuclear waste repository withinside the assessment of nuclear energy plant life. The trouble of the development of a long-time period nuclear waste repository withinside the Czech Republic is presently being subjected to extreme discussion, and follow-up research need to cope with this aspect. Regarding the assessment of renewable energy reasserts, this has a look at does now no longer compare the diploma of aid availability and the reliability of the delivery of energy to the countrywide grid

REFERENCES

- [1] International Energy Agency Data & Statistics-IEA. Available online: <https://www.iea.org/country=WORLD&fuel=Energyconsumption&indicator=Carbonintensityofindustryenergyconsumption> (accessed on 25 March 2020).
- [2] Laurent, A.; Espinosa, N. Environmental impacts of electricity generation at global, regional and national scales in 1980–2011: What can we learn for future energy planning? *Energy Environ. Sci.* 2015, 8, 689–701.
- [3] Scherer, L.; Pfister, S. Global water footprint assessment of hydropower. *Renew. Energy* 2016, 99, 711–720.
- [4] Kumar, A.; Melkote, S.N. Diamond Wire Sawing of Solar Silicon Wafers: A Sustainable Manufacturing Alternative to Loosen Abrasive Slurry Sawing. *Procedia Manuf.* 2018, 21, 549–566.
- [5] Bhat, I.K.; Prakash, R. LCA of renewable energy for electricity generation systems—A review. *Renew. Sustain. Energy Rev.* 2009, 13, 1067–1073. [6] Sherwani, A.F.; Usmani, J.A. Life cycle assessment of solar PV based electricity generation systems: A review. *Renew. Sustain. Energy Rev.* 2010, 14, 540–544.
- [6] Theodosiou, G.; Koroneos, C.; Stylos, N. Environmental impacts of the greek electricity generation sector. *Sustain. Energy Technol. Assess.* 2014, 5, 19–27.
- [7] Mahmud, M.A.P.; Huda, N.; Farjana, S.H.; Lang, C. Life-cycle of renewable electricity generation systems in the United States. *Renew. Energy* 2019, 151, 1028–1045.
- [8] Lieberei, J.; Gheewala, S.H. Resource depletion assessment of renewable electricity generation technologies—Comparison of life cycle impact assessment methods with focus on mineral resources. *Int. J. Life Cycle Assess.* 2017, 22, 185–198.
- [9] Turconi, R.; Boldrin, A.; Astrup, T. Life cycle assessment (LCA) of electricity generation technologies: Overview, comparability and limitations. *Renew. Sustain. Energy Rev.* 2013, 28, 555–565.
- [10] Curran, M.A. *Life Cycle Assessment Handbook*; John Wiley & Sons Inc.: Hoboken, NJ, USA, 2012; ISBN 978-1-118-09972-8.
- [11] Garcia, R.; Marques, P.; Freire, F. Life-cycle of electricity in Portugal. *Appl. Energy* 2014, 134, 563–572.
- [12] Orfanos, N.; Mitzelos, D.; Sagani, A.; Dedoussis, V. Life-cycle environmental performance assessment of electricity generation and transmission systems in Greece. *Renew. Energy* 2019, 139, 1447–1462.
- [13] An life cycle sustainability of electricity generation in Turkey. *Energy Policy* 2016, 93, 168–186. [8] A. Life cycle of electricity generation in Mexico. *Energy* 2011, 36, 1488–1499.
- [14] Mallia, E.; Lewis, G. Life cycle greenhouse gas emissions of electricity generation in the province of Ontario, Canada. *Int. J. Life Cycle Assess.* 2013, 18, 377–391.
- [15] Barros, M.V.; Salvador, R.; Piekarski, C.M.; de Francisco, A.C.; Freire, F.M.C.S. Life cycle of electricity generation: A review of the characteristics of existing literature. *Int. J. Life Cycle Assess.* 2020, 25, 36–54.
- [16] Life cycle assessment of energy generation in Poland. *Int. J. Life Cycle Assess.* 2016, 21, 1–14.

- [19] [8] García-Gusano, D.; Garraín, D.; Dufour, J. Prospective life cycle assessment of the Spanish electricity production. *Renew. Sustain. Energy Rev.* 2017, 75, 21–34.
- [17] Turconi, R.; Simonsen, C.G.; Byriel, I.P.; Astrup, T. Life cycle assessment of the Danish electricity distribution network. *Int. J. Life Cycle Assess.* 2014, 19, 100–108.
- [18] Ou, X.; Xiaoyu, Y.; Zhang, X. Life-cycle energy consumption for electricity generation and supply in China. *Appl. Energy* 2011, 88, 289–297. [22] Ministry of Industries and Trade. National Energy and Climate Plan of the Czech Republic; Ministry of Industry and Trade: Prague, Czech Republic, 2019.
- [19] CENIA. Zpráva o Životním Prostrědí České Republiky 2018; CENIA: Praha, Czech, 2018.
- [20] ERU. Roc̣ní Zpráva o Provozu ES CR. ě; ERU: Prague, Czech Republic, 2019.
- [21] Ministerstvo Životního Prostrědí Rámec v Oblasti Klimatu a Energetiky do Roku 2030. Available online:https://www.mzp.cz/cz/klimaticko_energetick_y_ramec_2030 (accessed on 26 March 2020).